


Plastifloor® 510 Terrazzo, the fast alternative to EP Terrazzo

Fast installation, jointless execution on wall, plinth included, coloured separations possible, fully chargeable only 2 hours after installation

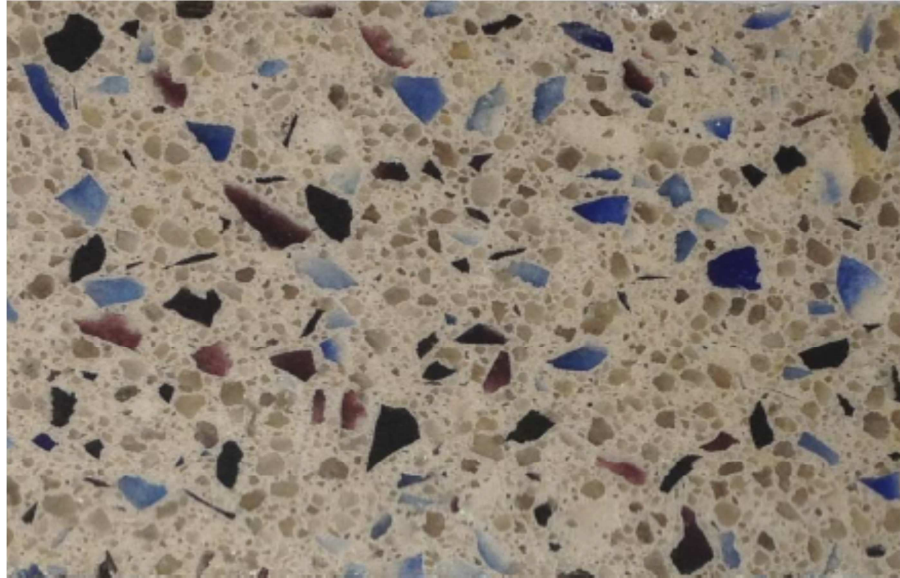

2nd sealer

Plastifloor® 522

0.2 kg/m²

clear

Polishing

Fine spattling

Plastifloor® 510

0.4 kg/m²

10 % pigment paste

Finishing

Coating

Plastifloor® 510

1.2 kg/m²

1:4 with filler C2

5 % pigment paste

up to 30 % flint

Rough grinding

Membrane

Plastifloor® 332

1.2 kg/m²

1:1 with s/l filler

slightly broadcast

with quartz sand 0.6 – 1.2 mm

Primer

Plastifloor® 112/113

0.5 kg/m²

slightly broadcast

with quartz sand 0.6 – 1.2